

LECTURE 13

REAL NUMBERS

How do we represent non-integers?

How do we represent non-integers?

Keeping in mind:

- If we consider n bits of memory,
 - their values can take 2^n combinations
 - so we can represent 2^n numbers at best with those n bits
- We have a finite amount of memory,
 - so we **cannot represent all real numbers**
- We (typically) want fast operations,
 - so (ideally) we need hardware to perform them.
 - Hardware has tight limits on the number of logic gates available

Practical limitations

- Integer are restricted in one way:
 - their **range** (e.g. $[\text{INT_MIN}, \text{INT_MAX}]$)
- Reals are restricted in two ways:
 - their **range** (e.g. $[-10^{308}, 10^{308}]$)
 - the number of reals we can represent in that range (e.g. $\{\dots, 0, 10^{-200}, 2 \times 10^{-200}, \dots\}$)
i.e. their **precision**

FIXED-POINT ARITHMETIC

Decimal example

Instead of computing money values in €, we could use ¢:

$$\text{e.g. } 29.99 \text{ €} = 2999 \text{ ¢}$$

then use integer operations.

- This is fixed-point arithmetic
- specifically, with 2 decimal places reserved for the fractional part.


If $+$, $-$, \times , $/$ are the elementary integer operations:

- **euro_to_cent**(e) := $e \times 100$
 - euro_to_cent(5 €) = 500 ¢
- **cent_to_euro**(a) := $a/100$
 - cent_to_euro(700 ¢) = 7 €
- **cent_add**(a, b) := $a + b$
 - cent_add(700 ¢, 500 ¢) = 1200 ¢
- **cent_sub**(a, b) := $a - b$
 - cent_sub(700 ¢, 500 ¢) = 200 ¢
- **cent_mul**(a, b) := $(a \times b)/100$

Binary fixed-point arithmetic

- There is no universally accepted standard for fixed-point arithmetic
- But there is no real need for one:
 - Only two parameters:
 - n : total number of bits
 - p : number of bits after the decimal point
 - All the operations are just integer operations
 - For `mul` and `div`, two integer operations each

Binary example

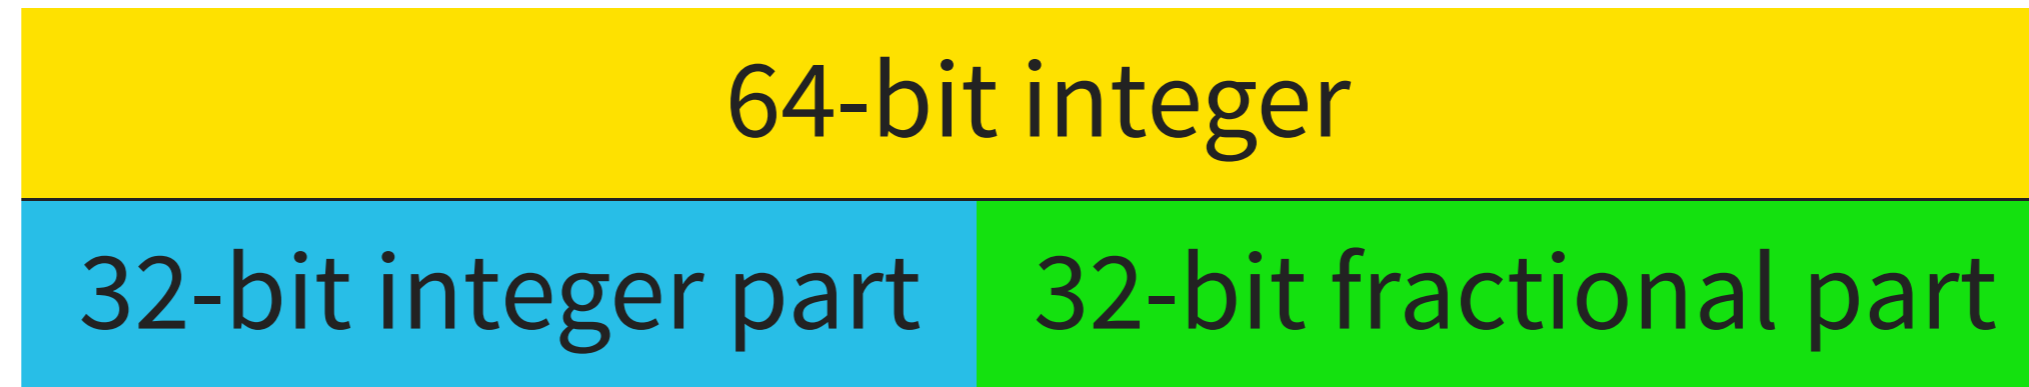

- $\text{i64_to_fix}(e) := e \times 2^{32}$
- $\text{fix_to_i64}(a) := a / 2^{32}$
- $\text{fix_add}(a, b) := a + b$
- $\text{fix_sub}(a, b) := a - b$
- $\text{fix_mul}(a, b) := (a \times b) / 2^{32}$

```
typedef int64_t fix;
```

```
static inline fix to_fix(int64_t e)
{
    return e << 32;
}

static inline int64_t from_fix(fix a)
{
    return a >> 32;
}

static inline fix fix_add(fix a, fix b)
{
    return a + b;
}

static inline fix fix_sub(fix a, fix b)
{
    return a - b;
}

static inline fix fix_mul(fix a, fix b)
{
    return ((__int128)a * b) >> 32;
}
```

Fixed-point arithmetic

Pros:

- fast, no need for extra hardware
- easy to understand and study (predictable):
 - uniform absolute precision (e.g. 2^{-32} over whole range)

Cons:

- limited range (e.g. $[-2147483648.999, 2147483647.999]$)
- limited precision (e.g. $2^{-32} \simeq 0.00000000002328$)

Possible improvements:

FLOATING-POINT ARITHMETIC

Scientific notation

Take the number -2147483648.999 :

$$\begin{aligned} & - 2147483648.999 \\ = & - 2.147483648999 \times 10^9 \\ & = -2.147483648999e+9 \end{aligned}$$

Similarly, take the number 0.0000000002328 :

$$0.0000000002328$$

$$2.328 \times 10^{-10}$$

Scientific notation (definition)

$$-2.147483648999 \times 10^{+9}$$

$$\pm d.mmmmm... \times 10^{\pm xxx..}$$

- \pm + or -
- d single digit between 1 and 9
- $mmmmm...$ predetermined number of digits between 0 and 9
- $\pm xxx..$ + or -, predetermined number of digits between 0 and 9

Binary floating-point numbers

$$\pm d . mmmmm . . . \times 2^{\pm xxx . . .}$$

- \pm sign bit + or -
- d single bit 1 and 1

Binary floating-point numbers

$$\pm 1.\text{mmmmm} \dots \times 2^{\pm\text{xxx} \dots}$$

- \pm sign bit + or -
- $\text{mmmmm} \dots$ “mantissa” bits
- $\pm\text{xxx} \dots$ “exponent” bits

Floating-point standard

- In 1985, the Institute of Electrical and Electronics Engineers publishes standard about floating-point arithmetic (IEEE-754)
- Most hardware makers adopt the standard very quickly thereafter
(Intel 30387, launched in 1987, is fully compliant)
- [x86_64](#) natively supports binary32 and binary64 formats
- [AArch64](#) natively supports binary16, binary32 and binary64 formats

component	binary16	binary32	binary64
\pm sign bit	1	1	1
mmmm . . . mantissa bits	10	23	52
\pm xxx . . exponent bits	5	8	11
exponent range	-14..15	-126...127	-1022...1023

Precision

Let $\text{fl}(x)$ be the floating-point representation of the real number $x \in \mathbb{R}$.

- **Absolute precision:** For a given x , the smallest e such that

$$\text{fl}(x + e) \neq \text{fl}(x)$$

- **Relative precision:** For a given x ,

$$\varepsilon := \frac{e}{|x|}$$

binary64 vs. fixed-point 32+32

fixed-point 32+32

floating-point binary

absolute


relative

absolute

rel

precision at 10^{-9}	2.33×10^{-10}	0.0233	2.07×10^{-25}	2.22×10^{-25}
precision at 10^{-6}	2.33×10^{-10}	2.33×10^{-5}	2.12×10^{-22}	2.22×10^{-22}
precision at 10^{-3}	2.33×10^{-10}	2.33×10^{-8}	2.17×10^{-19}	2.22×10^{-19}
precision at 1	2.33×10^{-10}	2.33×10^{-11}	2.22×10^{-16}	2.22×10^{-16}
precision at 10^3	2.33×10^{-10}	2.33×10^{-14}	1.14×10^{-13}	2.22×10^{-13}
precision at 10^6	2.33×10^{-10}	2.33×10^{-17}	1.16×10^{-10}	2.22×10^{-10}
precision at 10^9	2.33×10^{-10}	2.33×10^{-20}	1.19×10^{-7}	2.22×10^{-7}

The floating-point number line

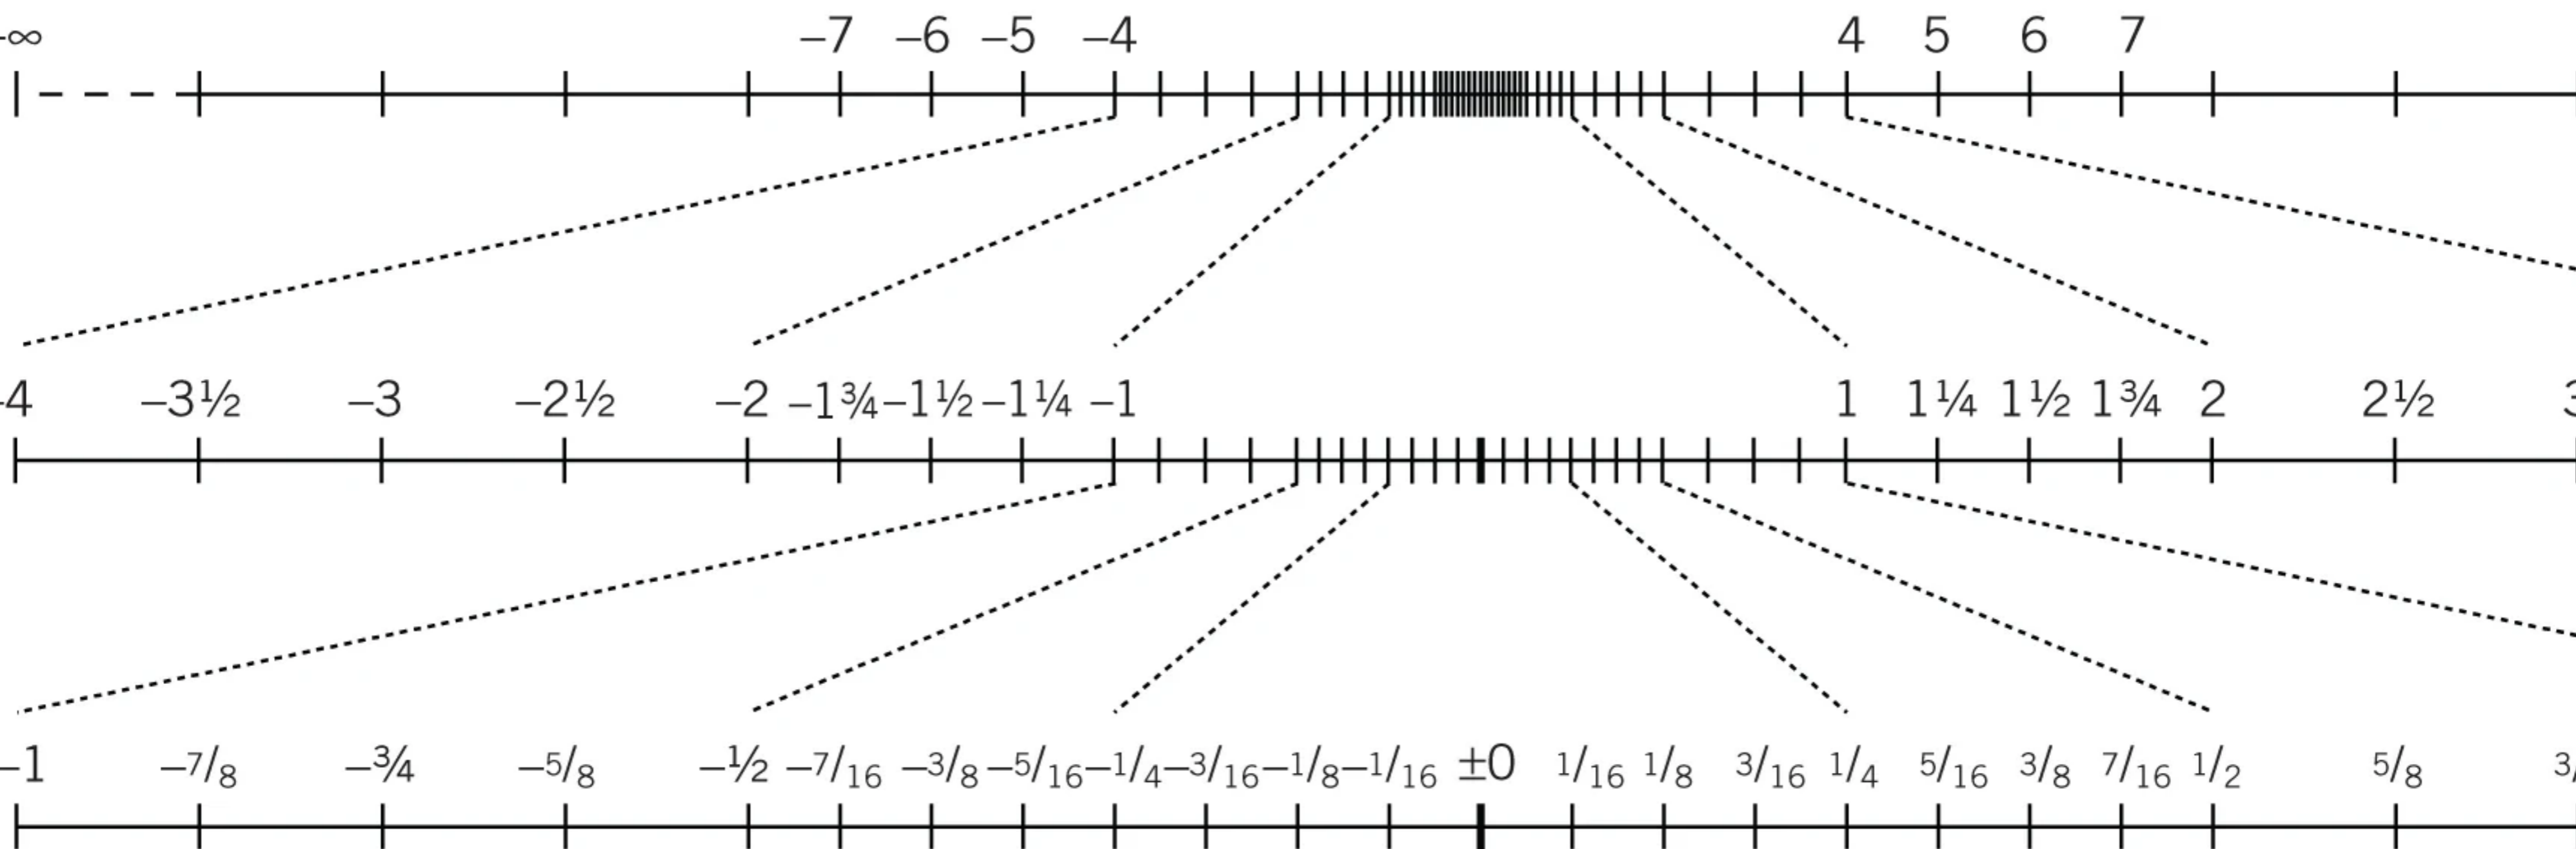

Languages that mandate IEEE-754 for floating-p

language	since	binary32	binary64
C	C99	float	double
C++	C++03	float	double
Fortran	Fortran 2003	real	double
Rust		f32	f64
Python			✓
JavaScript			✓

Inaccuracy

In base 10,

- $1/3 \simeq 0.3333$
- $2/3 \simeq 0.6666$
- $1/3 + 2/3 \simeq 0.9999$

In base 2,

```
>>> a = 0.1
>>> f'{a:.50f}'
'0.10000000000000000000555111512312578270211815834045410'
```

Numerical instability

Consider the following approximation of the derivative of f :

$$\frac{d}{dx} f(x) \simeq \frac{f(x + \delta) - f(x)}{\delta}$$

Let us consider the function f :

$$f(x) = x \quad \text{so} \quad \frac{d}{dx} f(x) = 1$$

- at $x = 10^{+5}$,

```
>>> ((1e+5 + 1e-6) - 1e+5) / 1e-6  
0.9999930625781417
```

- at $x = 10^{+8}$,

```
>>> ((1e+8 + 1e-6) - 1e+8) / 1e-6  
0.998377799987793
```

- at $x = 10^{+10}$,

```
>>> ((1e+10 + 1e-6) - 1e+10) / 1e-6  
1.9073486328125
```

What is happening?

```
>>> ((1e+10 + 1e-6) - 1e+10) / 1e-6
```

- At $x = 10^{+10}$, we first compute $(1e+10 + 1e-6)$
 - which is a big number, close to $1e+10$
 - floating-point numbers have a good *relative* accuracy everywhere, \simeq
 - but at 10^{+10} , the *absolute* accuracy is not great, $\simeq 1.91 \times 10^{-6}$
 - so the result of $(1e+10 + 1e-6)$ may be off by roughly 1.91×10^{-6}
- We then subtract $1e+10$.
 - If we were using exact arithmetic, we would get $1e-6$ exactly,
 - but we are using floating-point arithmetic,

Therefore,

- floating-point accuracy is often great
- but some algorithms are **unstable**
- we need to be extremely careful before trusting floating-point results

Never do exact comparisons

```
>>> 0.1 + 0.2 == 0.3  
False
```

```
>>> 1.0 + 1e-16 <= 1.0  
True
```

So how do we do comparisons?

- If exact comparisons are important, **do not use floating-point** arithmetic.
- If we care about speed and can tolerate some errors...

```
>>> 0.1 + 0.2 == 0.3
```

```
False
```

becomes

```
>>> tolerance = 1e-10
```

```
>>> abs( (0.1 + 0.2) - 0.3 ) <= tolerance
```

```
True
```

```
>>> x >= 0.0
```

becomes

FLOATING-POINT ROUNDING

Given a floating point number a , we want to compute $x = a/3$.

Q: If $a/3$ cannot be represented exactly by a floating-point number, what value do we give x ?

A: We “round” x to the floating-point number “closest” to the real value $a/3$.

Rounding modes

Rounding modes

- Round to nearest, ties to even (default)
 - nearest value
 - in case of ties, set last mantissa bit to zero
- Round to nearest, ties away from zero
 - nearest value
 - in case of ties, set last mantissa bit to one
- Round toward zero
 - if between two numbers, choose the one nearest to zero
 - even if it is not the nearest to the real value

Determinism

- Floating-point arithmetic is sometimes **inaccurate**
- but it is **deterministic**:
 - the result of most operations is **precisely defined**
 - we can predict the result of such operations **bit-for-bit**

Let us denote by $\text{fl}(x)$ the floating-point representation of the real number x

The IEEE-754 standard mandates correct rounding as specified by the currently-selected **rounding mode** for:

- addition, negation, subtraction: $x + y$ gives $\text{fl}(x + y)$
- multiplication, division: x / y gives $\text{fl}(x / y)$
- square root: $\text{sqrt}(x) = \text{fl}(\sqrt{x})$
- fused multiply-add: $\text{fma}(x, y, z) = \text{fl}(x \times y + z)$

Division example

When executing

$$z = x / y$$

- we first take the floating-point numbers x and y , and consider them as if they were (exact, infinite-precision) real numbers
- we compute the (exact, infinite-precision) real quotient x/y .
- we **round** the result according to the current **rounding mode**: $\text{fl}(x / y)$

Expression example

$$(y * (x + 4.0)) / (z - 3.0)$$

gives:

$$\text{fl} (\text{fl}(y \times \text{fl}(x + 4)) / \text{fl}(z - 3)))$$

About fused multiply-add

Beware:

$$\text{fma}(x, y, z) \neq x * y + z$$

Indeed:

- $\text{fma}(x, y, z) = \text{fl}(x \times y + z)$
- but $x * y + z$ gives $\text{fl}(\text{fl}(x \times y) + z)$

More floating-point non-identities

- associativity does not hold: $x + (y + z) \neq (x + y) + z$
- distributivity does not hold: $x * (y + z) \neq x * y + x * z$

The IEEE-754 standard mandates **correct rounding** for:

`+, -, ×, /, sqrt(), fma()`

The IEEE-754 standard **does not mandate correct rounding**
for most other functions, in particular:

- `sin, cos, tan`
- `asin, acos, atan`
- `sinh, cosh, tanh`

Floating-point and compilers

- C99 and C++03 mandate IEEE-754
- which in turn mandates **correct rounding** for $+$, $-$, \times , $/$, `sqrt()`, `fma`
- However, if we do not specify a C or C++ standard (e.g. `-std=c17` or `-std=c++17`)
gcc and clang **do not follow IEEE-754**
 - they will happily exploit associativity and distributivity
 - they will replace $x * y + z$ by `fma(x, y, z)`

Why does correct rounding matter?

- (generally) not because of accuracy
- but because for any real number x , there is exactly **one correct rounding**
- as a result, there is no ambiguity:
 - given a set of floating-point numbers
 - given any expression involving those numbers and $+$, $-$, \times , $/$, sqrt
 - there is **exactly one correct answer**
 - which is precisely specified by IEEE-754, down to its bit representation

What happens without correct rounding?

Results can change when:

- we change architecture
- we change compiler
- we change the standard C library
- we change the version of the compiler
- we change the version of the standard C library
- we change our code (even a completely unrelated part)

Note: If we use `sin`, `cos`, `tan`, `exp` which are not correctly rounded

BEYOND FLOATING-POINT ARITHM

Interval arithmetic

We represent every real number $x \in \mathbb{R}$
by a pair of floating-point number (l, u)
with $x \in [l, u]$.

We exploit the **Round toward $+\infty$** and **Round toward $-\infty$** modes
to compute the appropriate interval for every operation.

Pros

- fast
- we always know how accurate a result is

Cons

- the interval $[l, u]$ often becomes large very quickly
(the bounds are usually too pessimistic)

Unum

- introduced in 2015, latest revision 2017
- For a given fixed bit width, claims better allocation of available precision
- optional interval arithmetic
- very limited adoption (no hardware support on any mainstream platforms)

The GNU multi-precision library

GMP is a C library that provides support for:

- variable-width (a.k.a. arbitrary-size) integers
- arbitrary-size rational numbers (i.e. fractions):

$$\text{fraction} = \frac{\text{numerator}}{\text{denominator}},$$

where $\text{gcd}(\text{numerator}, \text{denominator}) = 1$

The GNU MPFR library

MPFR builds on top of GMP to add arbitrary-size floating-point numbers

```
double x = 22.0 / 7.0;
```

```
printf("%.20f\n", x);
```

```
mpfr_t x;
```

```
mpfr_init2(x, 512);           // initialize x with 512-bit mantissa
```

```
mpfr_set_ui(x, 22, MPFR_RNDN); // set x to value 22, round-to-nearest
```

```
mpfr_div_ui(x, 7, MPFR_RNDN); // divide x to 7, round-to-nearest
```

```
mpfr_printf("%.200Rf\n", x); // print x
```

```
mpfr_clear(x);              // free memory
```

Python fractions

Python integers are already variable-width by default:

```
>>> -2 ** 65  
-36893488147419103232      # <-- correct result, no over
```

Python fractions add support for (variable-width) rationals in top of the

```
import fractions
```

Why don't we always use exact rational numbers

- convenience (unfortunately)
 - need to use GMP in C
 - need “`import fractions`” in Python
- memory
 - the size of the numerator and denominator can explode in iterative algorithms
(despite gcd reductions)
- speed
 - since arbitrary-sized integers don't come with native hardware support

Should we use exact rational numbers more often

(in particular when exactness matters)

(or when speed does not matter)

YES

Symbolic computations

In a symbolic algebra system:

- $\sqrt{2}$ is never evaluated to $\simeq 1.4142$:

```
sage: sqrt(8)  
2*sqrt(2)
```

- We can also carry variables that have no specific value:

```
sage: x, y, z = var('x y z')  
sage: sqrt(8) * x  
2*sqrt(2)*x
```


- This allows us to solve problems symbolically:

- SageMath (free software, syntax similar to Python)
- Maple
- Wolfram Mathematica



derivative of $\log(x^3 + x^2)$

 NATURAL LANGUAGE

 MATH INPUT

 EXTENDED KEYBOARD

 EXAMPLES

 UPLOAD

 RANDOM

Assuming "log" is the natural logarithm | Use [the base 10 logarithm](#) instead

Derivative

Step-by-step solution

$$\frac{d}{dx}(\log(x^3 + x^2)) = \frac{3x + 2}{x^2 + x}$$

